

*The Luxriot DVR Hybrid Capture Boards are designed to work with Luxriot EVO S and Global Server Software to capture & record Analog Video Streams*



Capture Devices

## LUXRIOT HYBRID BOARDS

### Features:

- Full or Low Profile\*
- Realtime 30fps Per Channel
- Hardware Motion Detection
- Audio and Video on All Channels\*
- H.264 Compression
- 32 & 64 Bit Windows Drivers
- NTSC/PAL
- Up to 1080p Resolution for HDCCTV SDI Board.
- Up to D1 Resolution for Standard Boards.

Optimized & Designed for:



## ● Luxriot Models

Luxriot Hybrid Capture Board Models			
HC7008	HC7008L	HC7016	HC7016L
HC7032	HC7004HD		

L is for Low Profile

## ● Specifications

Boards	HC7008*	HC7016*	HC7032	HC7004HD (HDCCTV)
<b>Power Input</b>	None	SATA Power		
<b>Form Factor</b>	PCI-E X1			
<b>Total FPS</b>	240	480	960	120
<b>Compression</b>	H.264			
<b>Resolutions</b>	Up to D1			Up to 1080p
<b>Drivers</b>	Windows 32 Bit and 64 Bit			
<b>Formats</b>	NTSC/PAL			
<b>Boards Per Machine</b>	4	4	4	4
<b>Video Inputs</b>	8	16	32	4
<b>Audio Inputs</b>	8	16	32	4
<b>Motion Detection</b>	On Board			
<b>Video Outs</b>	2			0


\* Full or Low Profile

- Luxriot Boards Detailed

HC7008




HC7008L

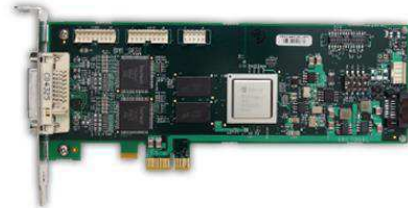


HC7016



HC7016L

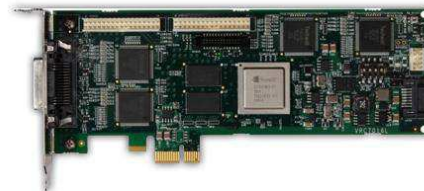

HC7032

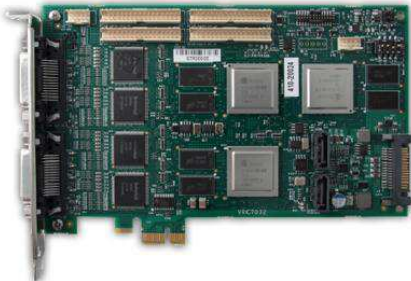

HC7004HD

